



pumpwire

WE'RE BIG IN BIG PUMP WIRE




P7271M-SP
FLAT SUBMERSIBLE PUMP CABLE
2 & 3 CONDUCTOR WITH GROUND
600/2000 VOLTS
 INSULATION: POLYVINYL CHLORIDE AND NYLON
 JACKET: POLYVINYL CHLORIDE
 SIZES: 12 - 500 MCM 90°C Dry, 75°C Wet




Paige

HEAVY-DUTY MINING CABLE

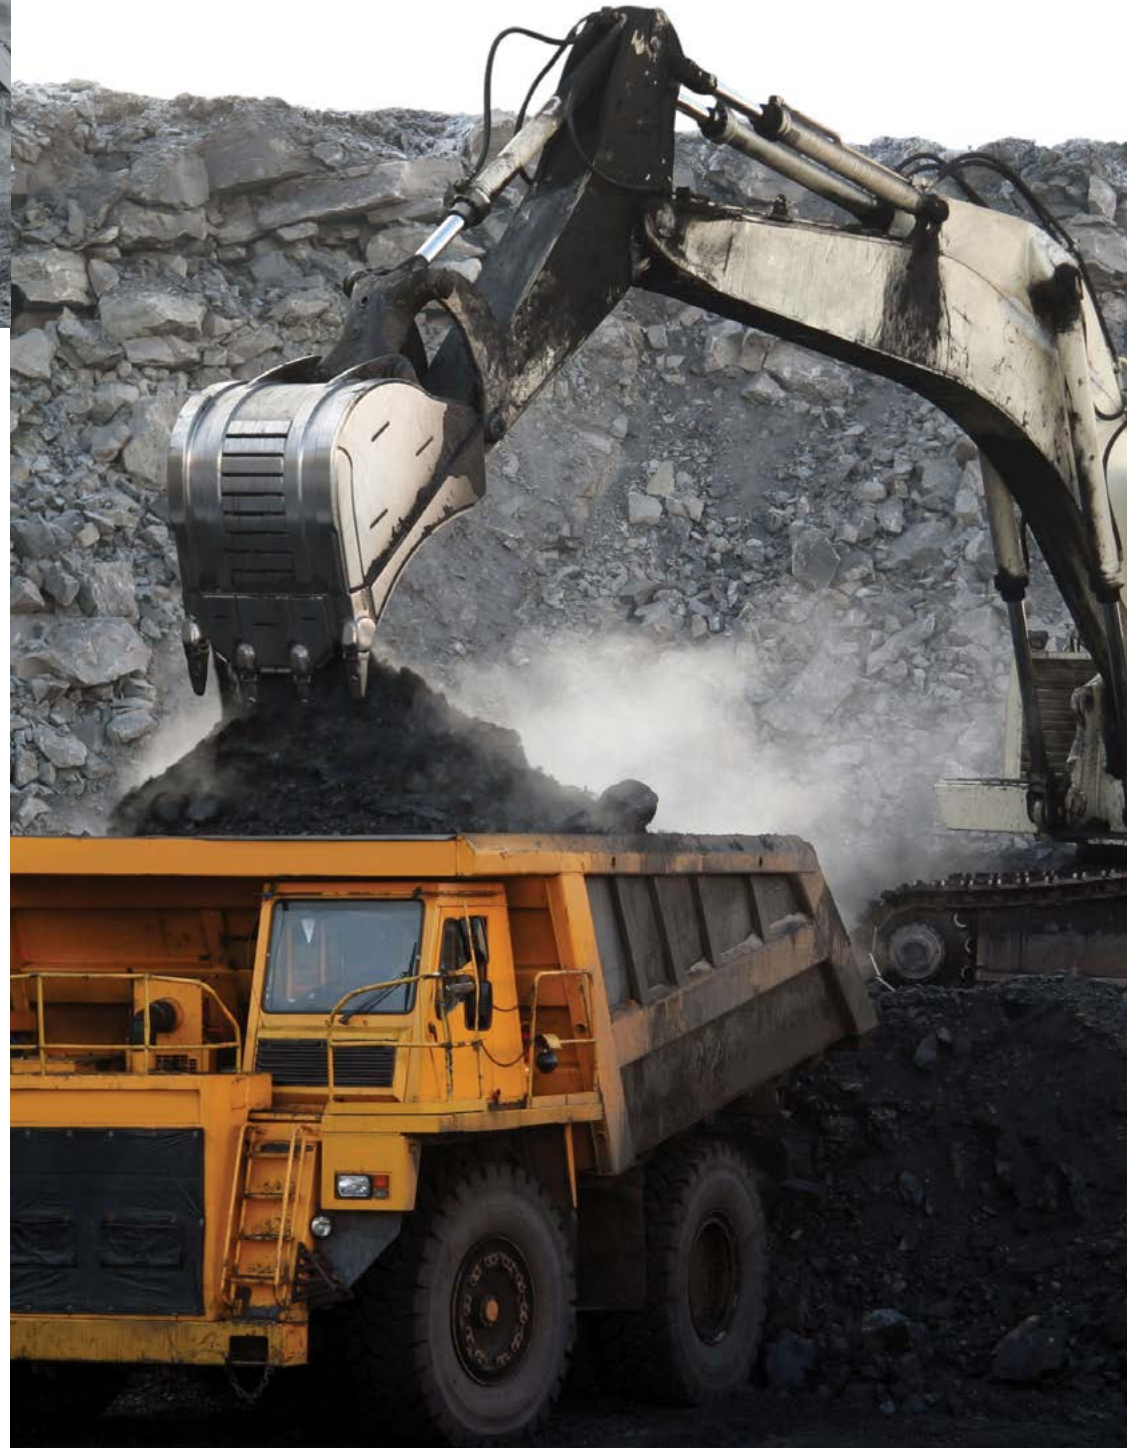


Paige

HEAVY-DUTY MINING CABLE

Jim Coffey: jcoffey@paigeelectric.com
 Kim Phillips: kphillips@paigeelectric.com
 Paige Electric Co, LP
 3304 Sawgrass Village Circle
 Ponte Vedra Beach, Florida 32082
 Phone: 904.543.1223
 Phone: 800.997.2443
 Fax: 904.543.1330



Paige

asia pacific

Joe Di Rienzo: jdirienzo@paigeelectric.com
 Paige Electric Co, LP
 #12 LANE 34 Gu Gong Road
 Taipei, Taiwan 111
 Phone: 886.2.2883.2955
 Fax: 886.2.2883.7276



P7279M-GGC
TYPE GGC MINING
ROUND FLEXIBLE PORTABLE POWER CABLE
 WITH GROUND & GROUND CHECKS
 INSULATION: (EPR) ETHYLENE-PROPYLENE RUBBER
 JACKET: (CPE) CHLORINATED POLYETHYLENE RUBBER
 SIZES: **8 AWG - 500 MCM, 2-3 CONDUCTORS** 600/2000 VOLTS, 90°C



P7282M-W
TYPE W MULTI-CONDUCTOR PORTABLE
POWER CABLE 600/2000 VOLTS
 INSULATION: (EPR) ETHYLENE-PROPYLENE RUBBER
 JACKET: (CPE) CHLORINATED POLYETHYLENE RUBBER
 SIZES: **8 AWG - 500 MCM, -40°C + 90°C**



P7305M-DLO
TYPE DLO/RHH/RHW-2/RW90 SINGLE CONDUCTOR
EXTRA FLEXIBLE CABLE 600/2000 VOLTS
 INSULATION: (EPR) ETHYLENE-PROPYLENE RUBBER
 JACKET: (CPE) CHLORINATED POLYETHYLENE RUBBER
 SIZES: **16 AWG - 1111 AWG SINGLE CONDUCTOR, 90°C WET/DRY**



P7342M-SO
TYPE SOOW 600V UL/CSA/MSHA
PORTABLE CORD & CONTROL CABLE
 INSULATION: (EPR) ETHYLENE-PROPYLENE RUBBER
 OUTER JACKET: (CPE) CHLORINATED POLYETHYLENE RUBBER
 SIZES: **18 AWG - 2 AWG, 90°C WET/DRY**



P7326M-SP
FLAT SUBMERSIBLE PUMP CABLE
EXTRA FLEXIBLE HYDROFLEX
600/2000 VOLTS 3 CONDUCTOR
 WITH OR WITHOUT GROUND
 INSULATION: (EPR) ETHYLENE-PROPYLENE RUBBER
 JACKET: (CPE) CHLORINATED POLYETHYLENE RUBBER
 SIZES: **4 - 500 MCM, 90°C Dry, 90°C Wet, Min. ambient temp. -40°C**



P7324M-SP
FLAT SUBMERSIBLE PUMP CABLE
5000 VOLTS
TESTED GOOD FOR 2.4kV PER NEC
 INSULATION: (XLPE) CROSS-LINKED
 JACKET: **BLACK POLYVINYL CHLORIDE**
 SIZES: **6 - 2/0 AWG - 3 CONDUCTOR, 90°C DRY/75°C WET**



P7324AM-SP
FLAT SUBMERSIBLE PUMP CABLE 3 CONDUCTOR
Tufhide CABLE WITH GROUND
 INSULATION: (XLPE) CROSS-LINKED
 JACKET: **POLYVINYL CHLORIDE**
 SIZES: **2 AWG & 4 AWG**



P7364M-15KV SHD-GC
P7364M-5KV SHD-GC CSA C22.2 No. 96-03
5000 & 8000V/1500V SHD-GC
PORTABLE POWER CABLE, EXTRA HEAVY DUTY
EPR/NEO 90°C MSHA MINING GRADE
 INSULATION: (EPR) ETHYLENE-PROPYLENE RUBBER
 OUTER JACKET: **REINFORCED NEOPRENE**
 SIZES: **6 AWG - 1 AWG, ICEA S-75-381/NEMA WC58, ASTM B 172, ASTM B 33**



P7341M-5KV SHD-GC
PORTABLE POWER CABLE
EXTRA HEAVY DUTY EPR/NEO 90°C
MSHA MINING GRADE 3 CONDUCTOR SHIELDED-GC
5000V
 INSULATION: (EPR) ETHYLENE-PROPYLENE RUBBER
 OUTER JACKET: **NEOPRENE**
 SIZES: **6 AWG - 500 MCM, 90°C Wet/Dry, C(UL) MSHA**



P7341M-MP-GC-15000V-XLP-PVC
MINE POWER FEEDER CABLE
XLP/PVC 90°C MSHA MINING GRADE
 INSULATION: **XLP**
 OUTER JACKET: **PVC**
 SIZES: **4 AWG - 2 AWG, UL 1072, ASTM B 8, ICEA S-75-381/NEMA WC58**

